


Below Ground

Source from: <http://www.nb-kaituo.com>

High Temperature, Pre-Insulated Conduit System

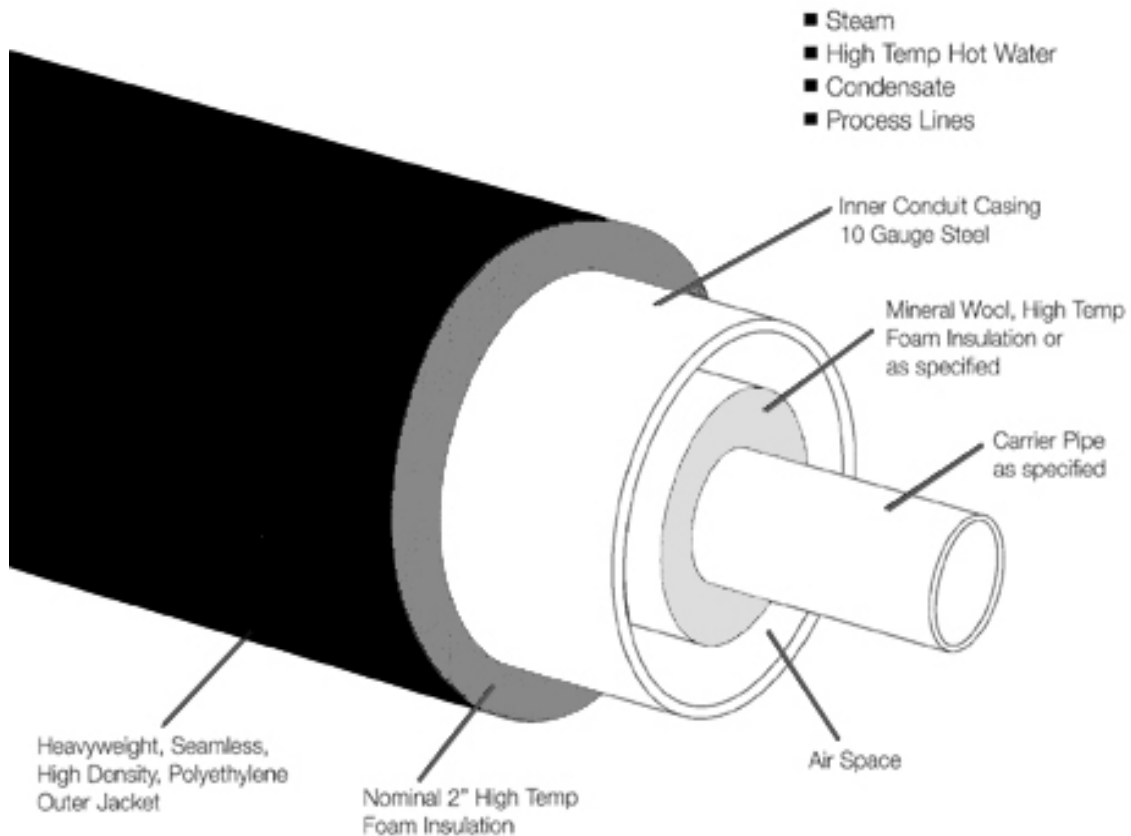

Rovanco the 800 high-temperature systems for underground pipe conduit, high temperature (210 F and above) open. [Sleeve shafts](#)

It is exhaustible, hairdryer and Air testable. The product consists of steel, copper or stainless steel carrier pipe, [spare auto parts](#) mineral wool or foam insulation is high temperature. [linear ball screw](#) The insulated pipe is enclosed in an internal evaluation of 10-gauge steel casing pipe that is insulated with foam insulation high temperature, 400 F for continuous operation. The outer layer of foam is seamless, thanks to a truck, protected by high-density polyethylene outer sheath. This combination of an economic, high quality, high temperature, and energy efficient system available. Because the system uses a sheath of polyethylene non-corrosive, does not require the operating system, cathodic protection.

Component 800 High Temp Conduit is numbered Rovanco island designed to cut large piece of checked the dimensions of space. All tubes are in angles, tees, anchor and seal the end added to the queue lengths for pipe fittings for Rovanco Joliet, Illinois plant.

The 800 islands High Temp Conduit is shipped complete with all accessories, such as steel sleeve, together with polyethylene insulation and shrink sleeves to make the insulation completely waterproof.

Contact us:

Ningbo Kaituo Sewing Machinery Co., Ltd.

Ningbo Office

·Address: South of Yonggang Road 99, No.7, Floor 4, Ningbo, China

·Tel: 0574-87835343

·Fax: 0574-87835343

·P.C.: 315040

·Email : sales@nb-kaituo.com

info@nb-kaituo.com

Ningbo Factory :

·Add: Cailangqiao, Jiangshan Town, Yinzhou District, NINGBO, CHINA

·Tel: 86-574-88475073

·Fax: 86-574-88475547

·P.C.: 315136